




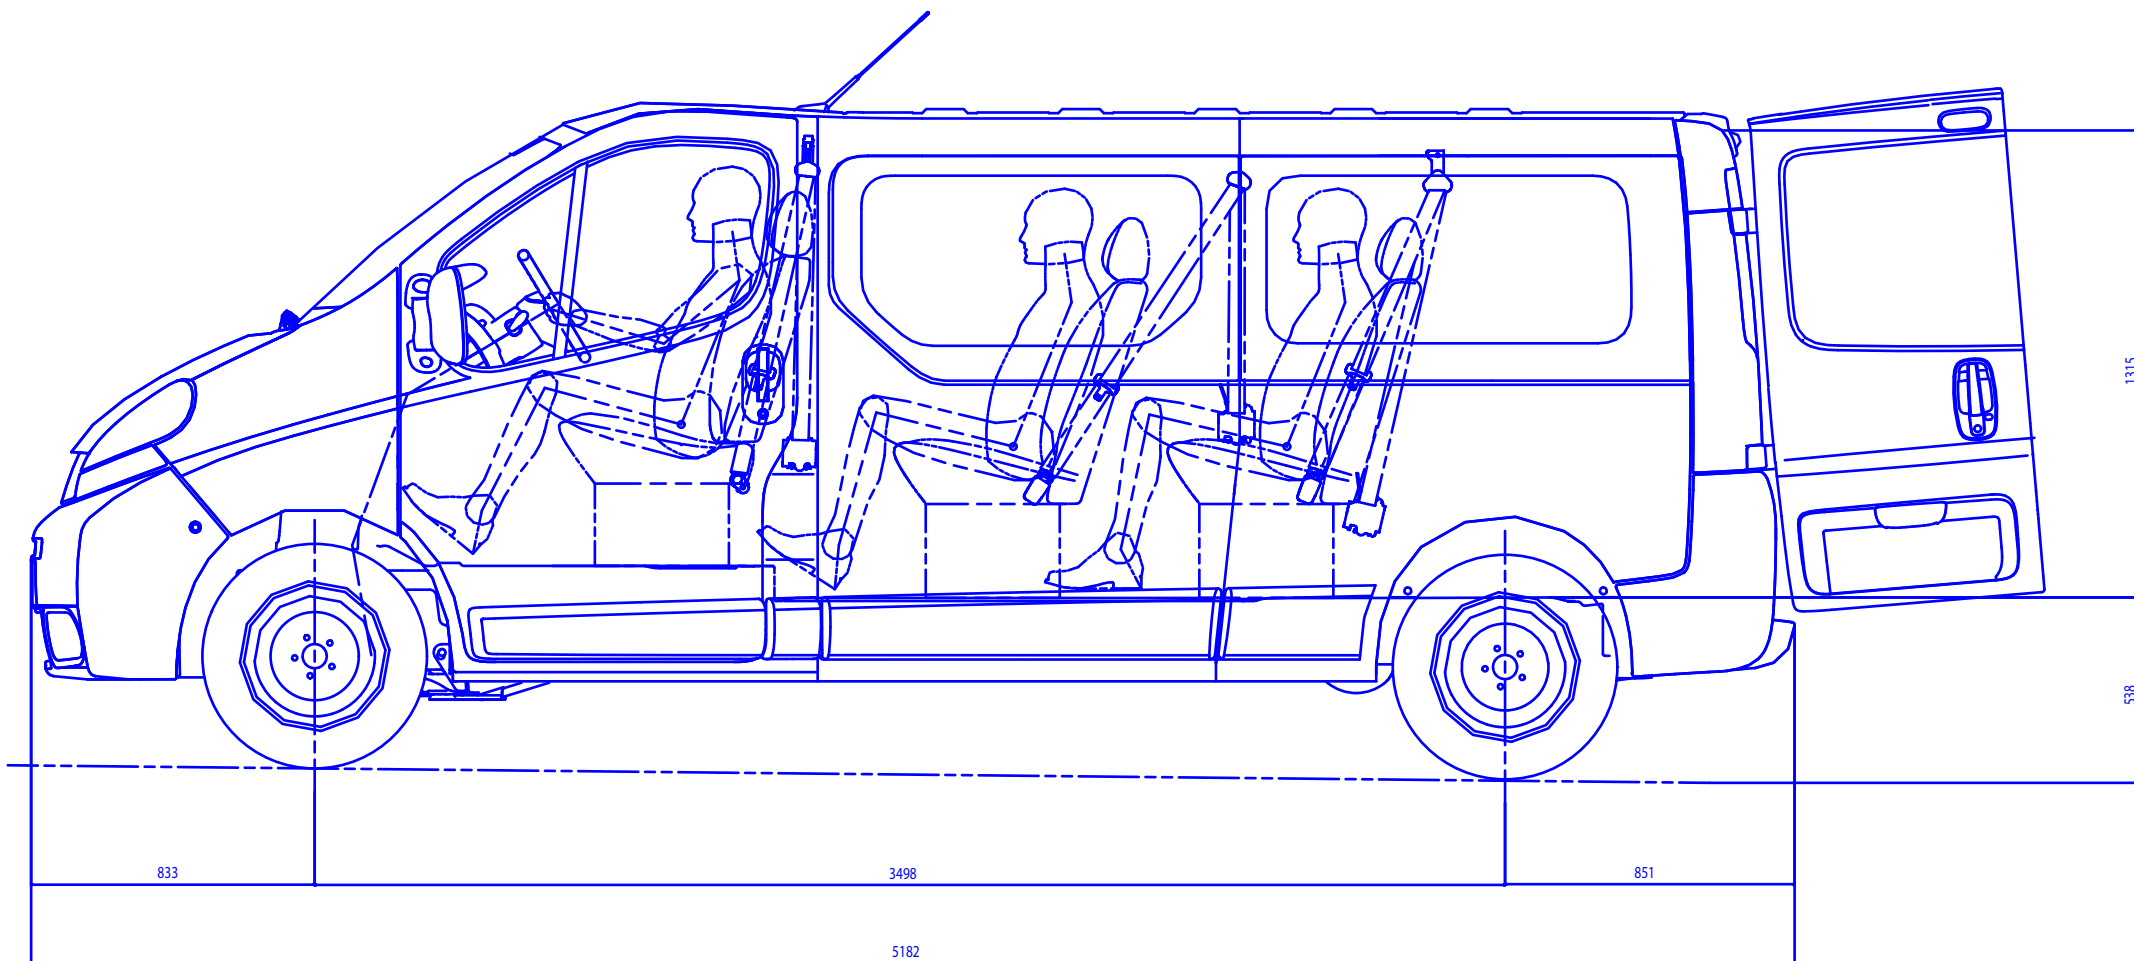

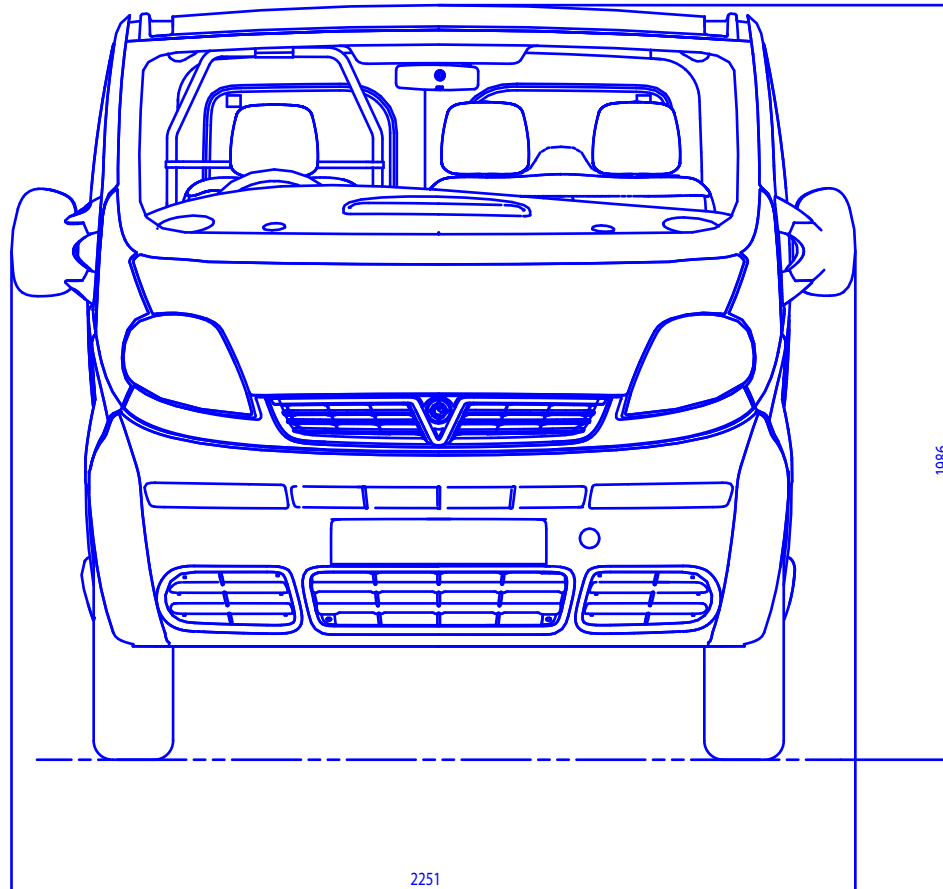


2251

1986

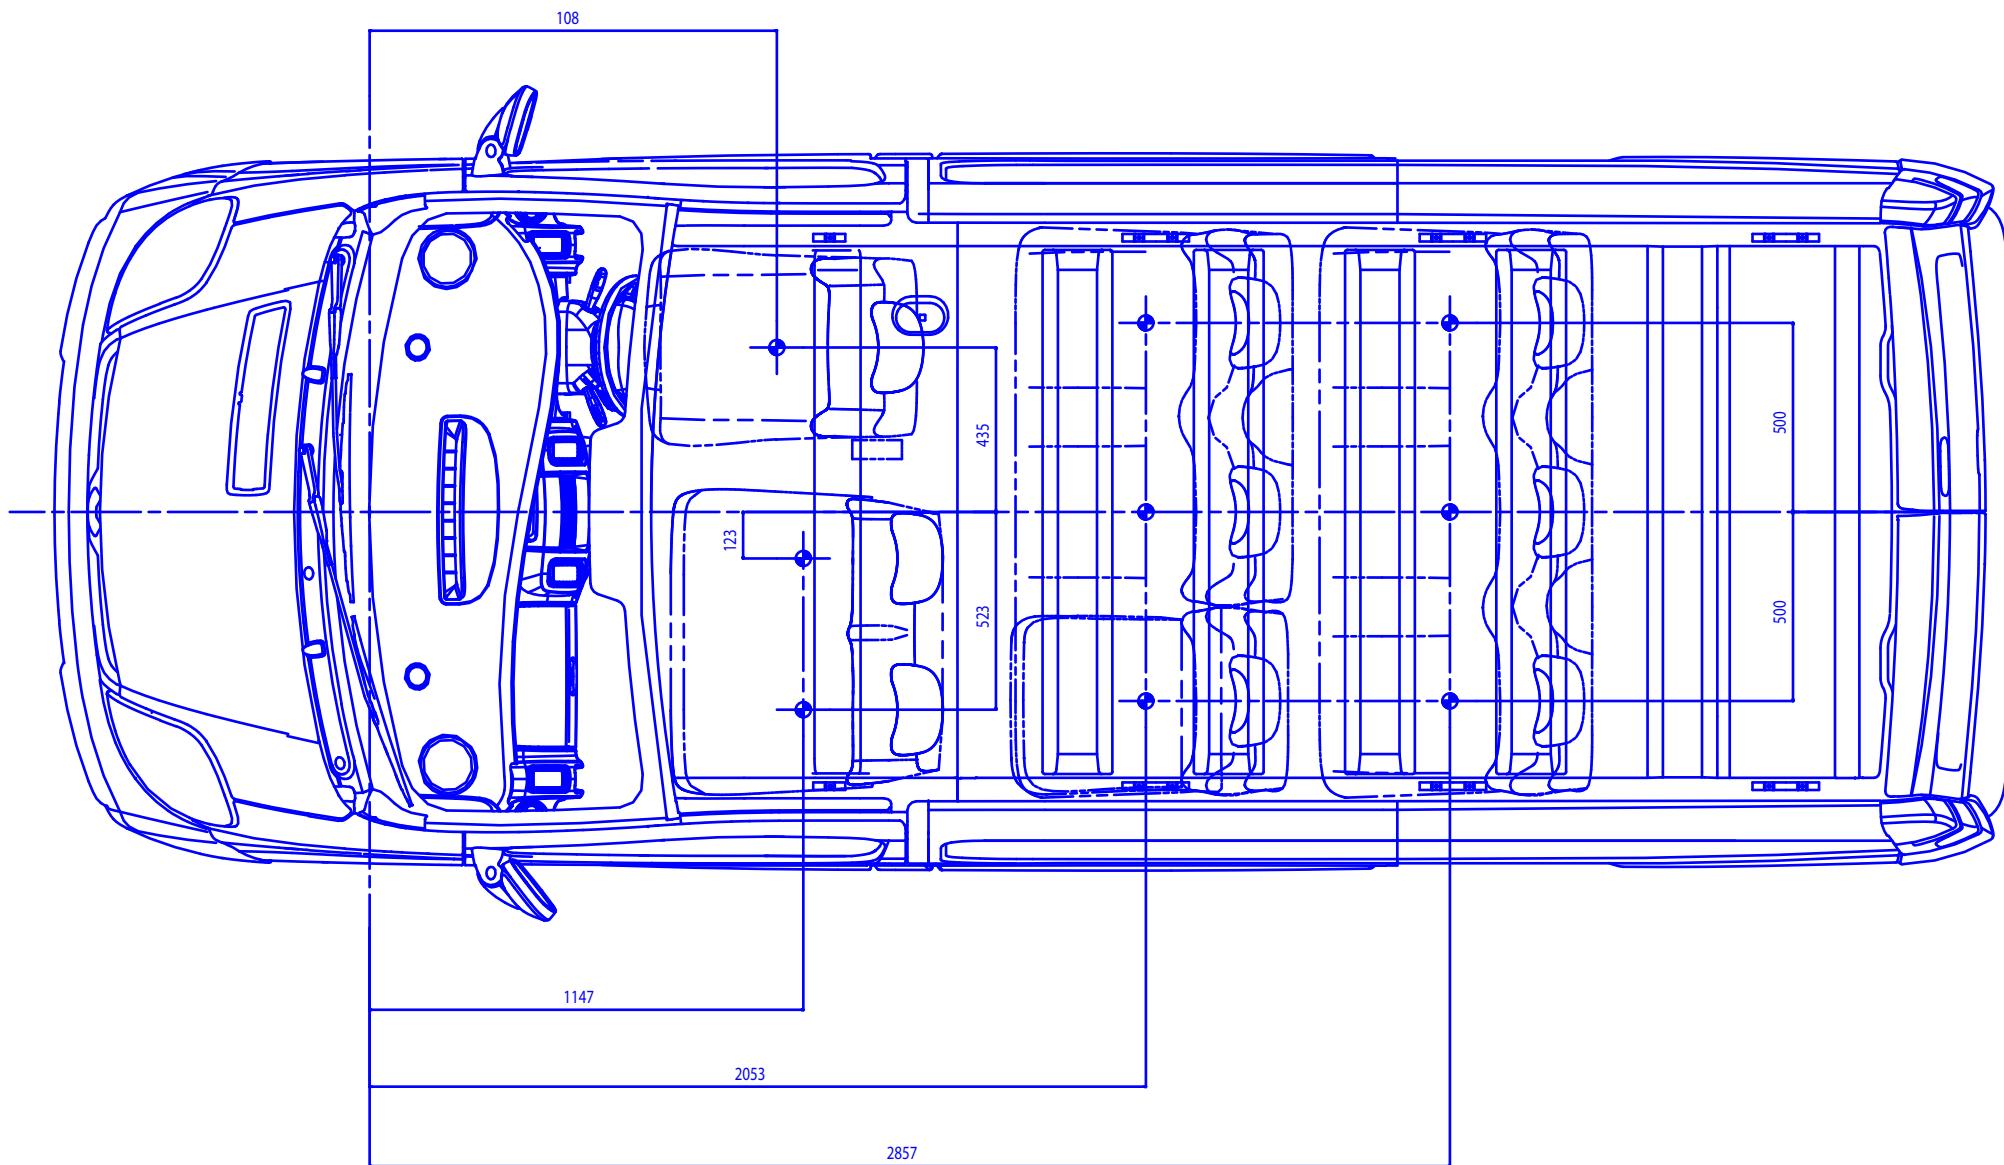

1393

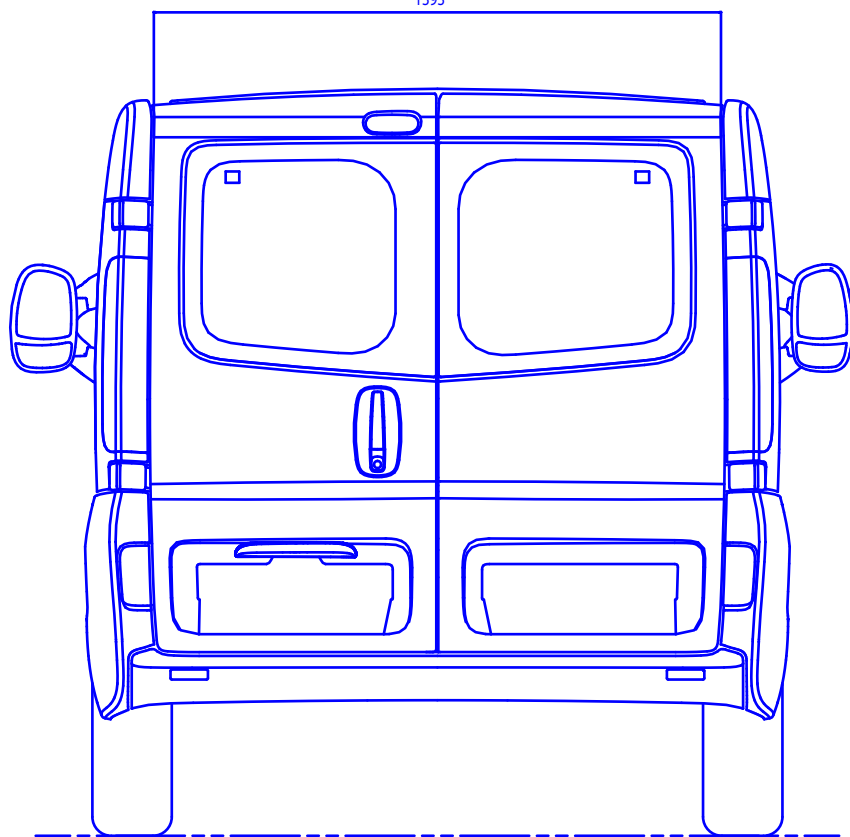

		COMBI WITH 3 SEATS								
	MODEL	J7BCB6			J7BAB6			J7BBB5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	205/65 R16								
	MAXIMUM AXLE LOAD	FA = 1550 RA = 1650								
	perm. towed laden weight	4800								
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1069	702	1771	1055	700	1755	1069	702	1771
	unladen weight MAX	1148	782	1930	1134	780	1914	1148	782	1930
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN	1465	1495	2960	1451	1494	2945	1465	1495	2960
	ALD 3 MAX	1485	1475	2960	1471	1474	2945	1485	1475	2960
	ALD 6 MIN									
	ALD 6 MAX									
	ALD 9 MIN									
	ALD 9 MAX									

		COMBI WITH 6 SEATS								
	MODEL	J7BCB6			J7BAB6			J7BBB5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	205/65 R16								
	MAXIMUM AXLE LOAD	FA = 1550 RA = 1650								
	perm. towed laden weight	4800								
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1095	740	1835	1081	738	1819	1095	740	1835
	unladen weight MAX	1174	820	1994	1160	818	1978	1174	820	1994
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN									
	ALD 3 MAX									
	ALD 6 MIN	1432	1528	2960	1418	1527	2945	1432	1528	2960
	ALD 6 MAX	1472	1488	2960	1458	1487	2945	1472	1488	2960
	ALD 9 MIN									
	ALD 9 MAX									

		COMBI WITH 9 SEATS								
	MODEL	J7BCB6			J7BAB6			J7BBB5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	205/65 R16								
	MAXIMUM AXLE LOAD	FA = 1550 RA = 1650								
	perm. towed laden weight	4700			4685			4700		
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1107	793	1900	1093	791	1884	1107	793	1900
	unladen weight MAX	1187	870	2057	1173	868	2041	1187	870	2057
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN									
	ALD 3 MAX									
	ALD 6 MIN									
	ALD 6 MAX									
	ALD 9 MIN	1412	1548	2960	1398	1547	2945	1412	1548	2960
	ALD 9 MAX	1472	1488	2960	1458	1487	2945	1472	1488	2960

Note 1:

- All weight details are based on the standard specification, without driver.
- Tyres in accordance with table.
- Fuel tank.
- Tool kit.
- Unladen weight min. : operational unladen weight (oil, water etc. filled) of model without options.
- Unladen weight max. : operational unladen weight (oil, water etc. filled) of model with all options.
- ALD3 min.: axle load distribution with 1 driver + 2 front passengers + max. load (design: unladen weight min).
- ALD3 max.: axle load distribution with 1 driver + 2 front passengers + max. load (design: unladen weight max).
- ALD6 min.: axle load distribution with 1 driver + 5 front passengers + max. load (design: unladen weight min).
- ALD6 max.: axle load distribution with 1 driver + 5 front passengers + max. load (design: unladen weight max).
- ALD9 min.: axle load distribution with 1 driver + 8 passengers + max. load (design: unladen weight min).
- ALD9 max.: axle load distribution with 1 driver + 8 passengers + max. load (design: unladen weight max).

Note 2:

- Weight distribution of vehicle passengers:

COMBI WITH 3 SEATS				COMBI WITH 6 SEATS			COMBI WITH 9 SEATS		
	FA	RA	Total:	FA	RA	Total	FA	RA	Total
Weight of driver	53	22	75	53	22	75	51	24	75
Weight of 2 front passengers	103	47	150	103	47	150	105	45	150
Weight of 3 passengers				96	129	225	96	129	225
Weight of 3 passengers							45	180	225

Note 3:

- Minimum front axle load at perm. total weight : 1300 kg
- Note maximum perm. axle loads: 2960 kg: FA = 1550 kg RA = 1650 kg.

Note 4:

- Vehicle variants:
- Individual front passenger seat instead of bench seat.
- Co-driver airbag
- Air conditioning system.
- Trailer towing hitch.
- half glazed
- Tyre optional 215/65 R16

return to
model overview