






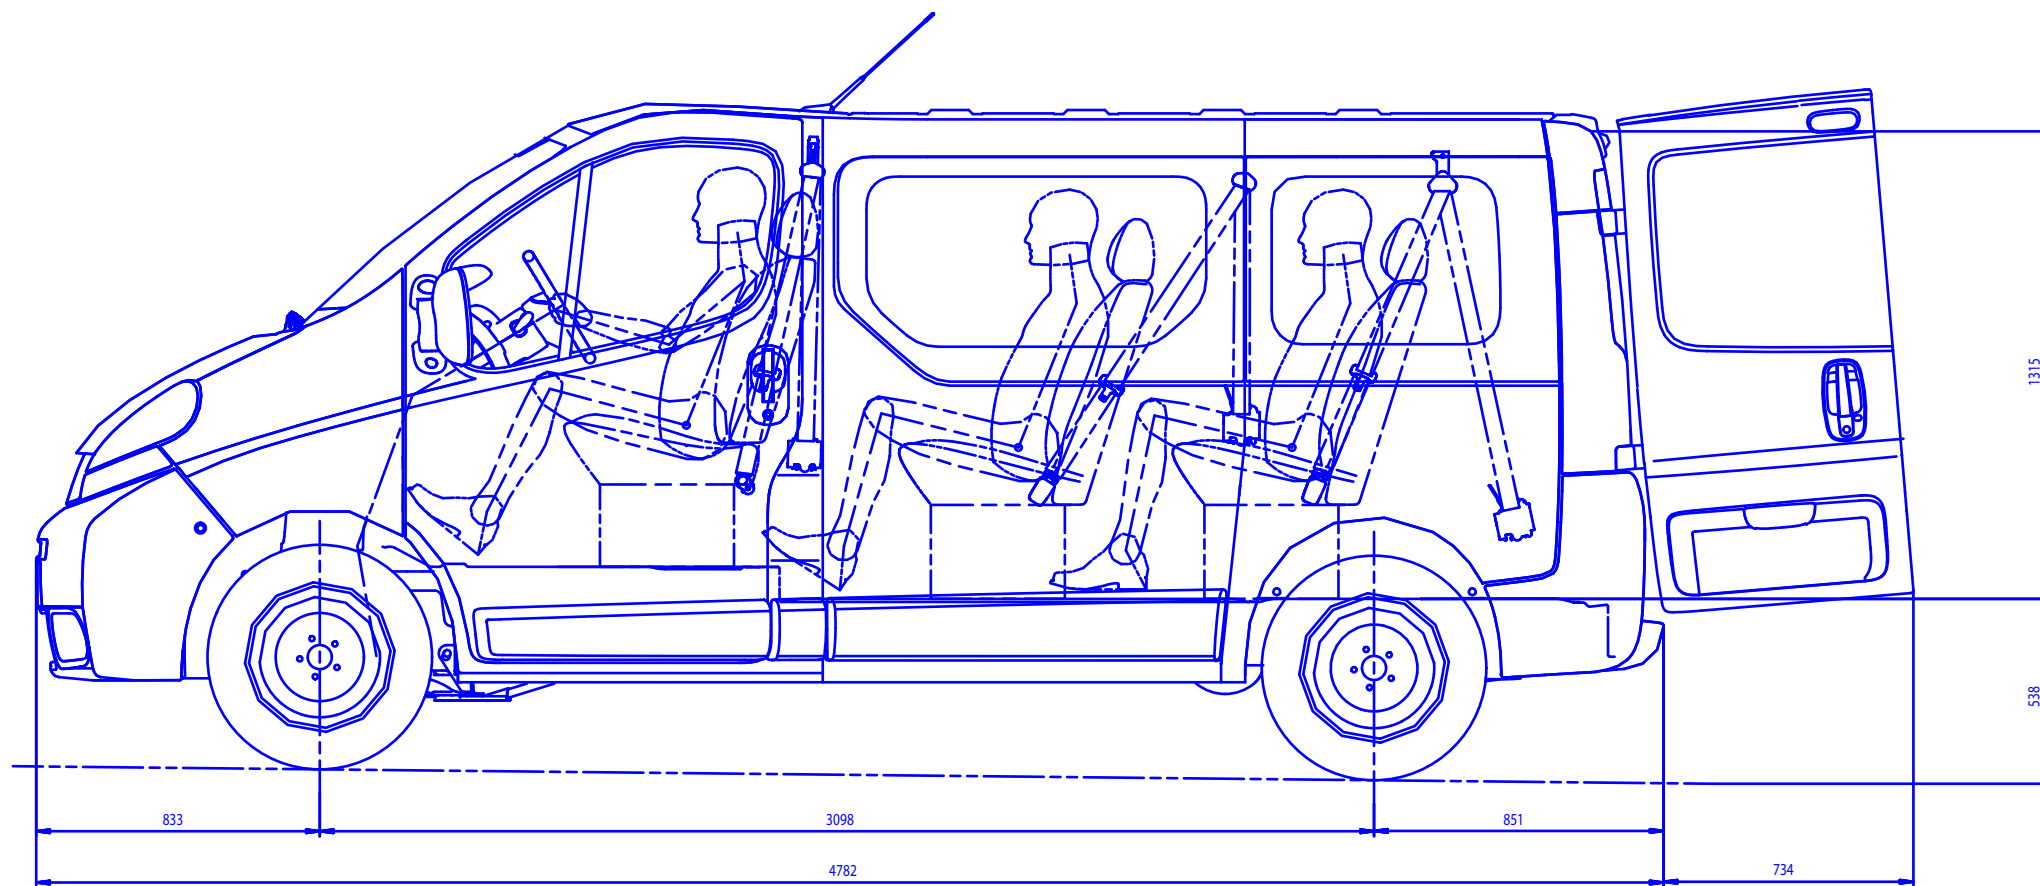

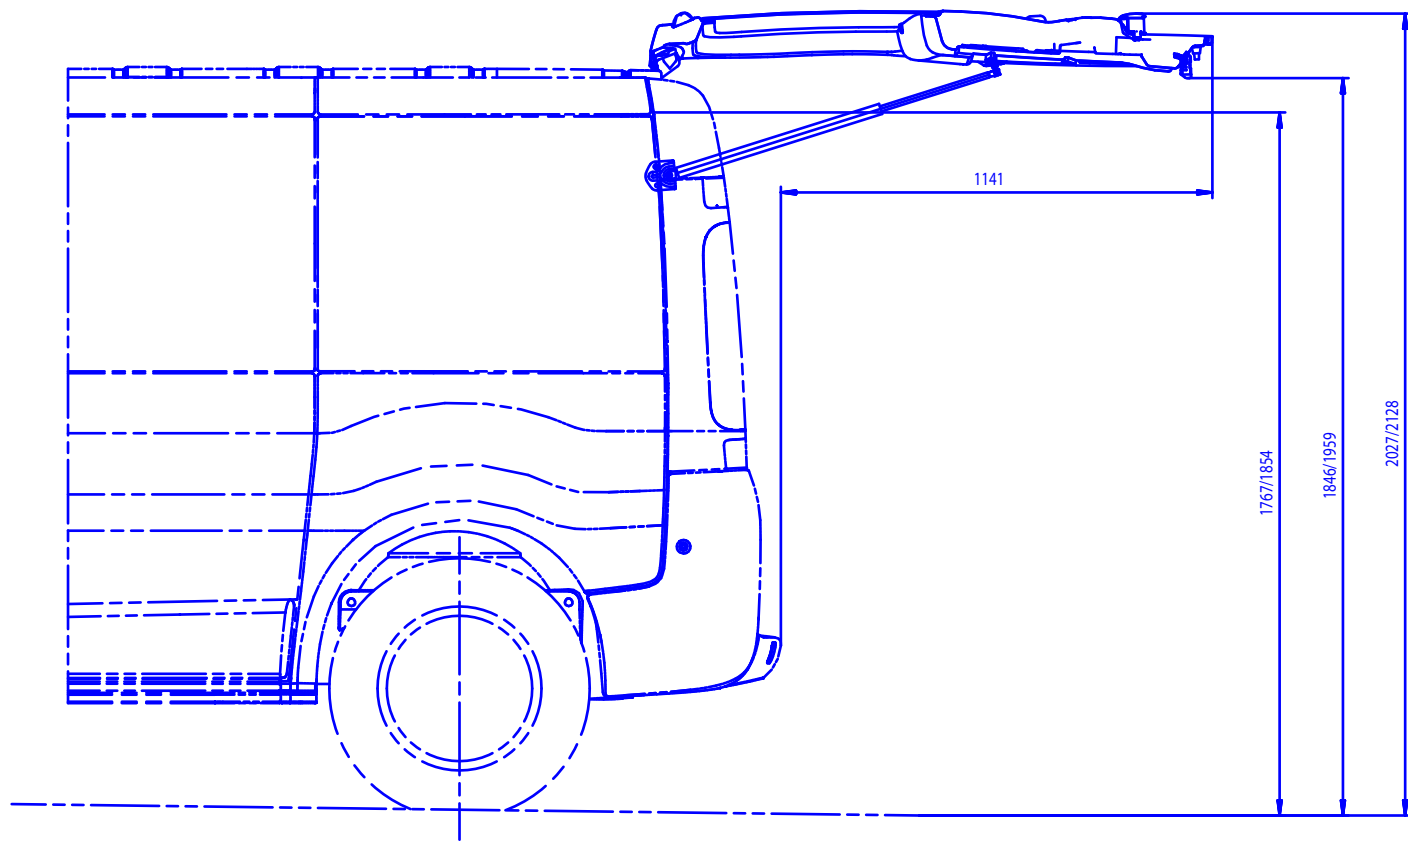

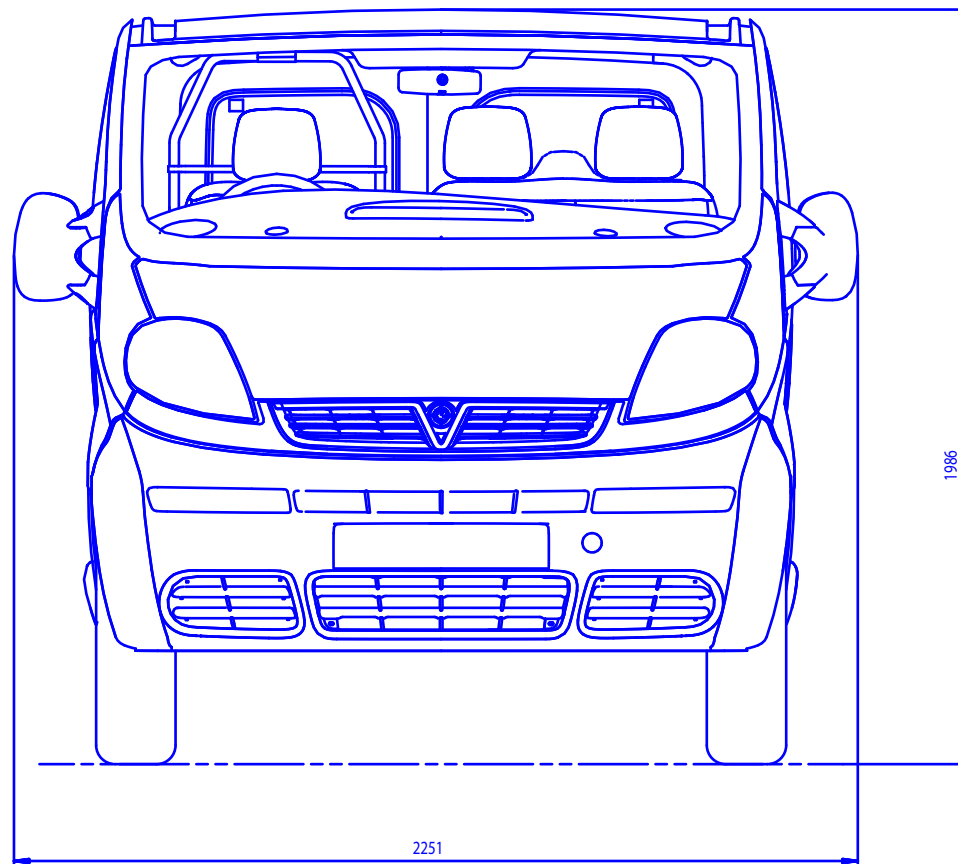

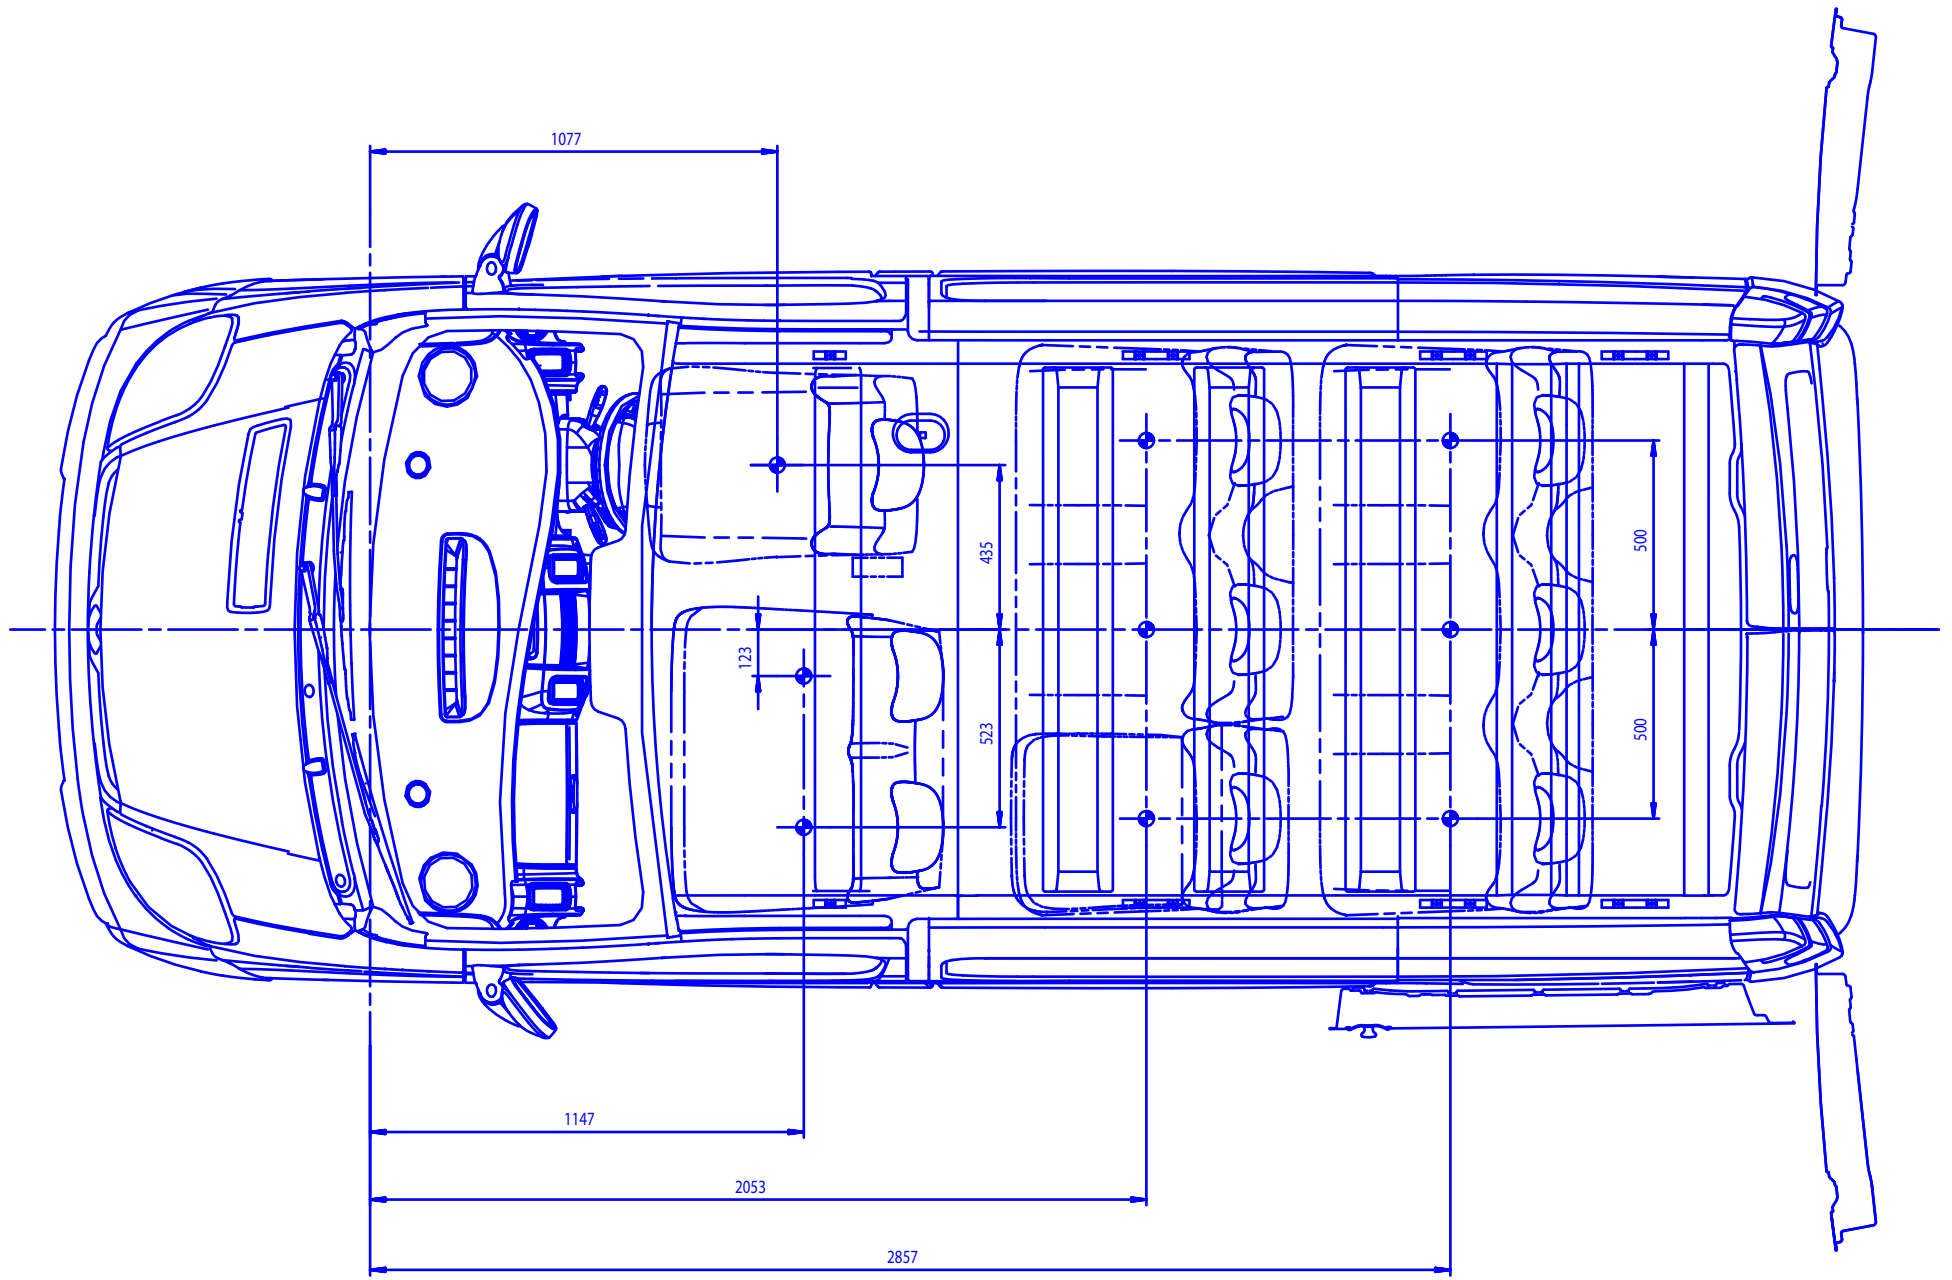

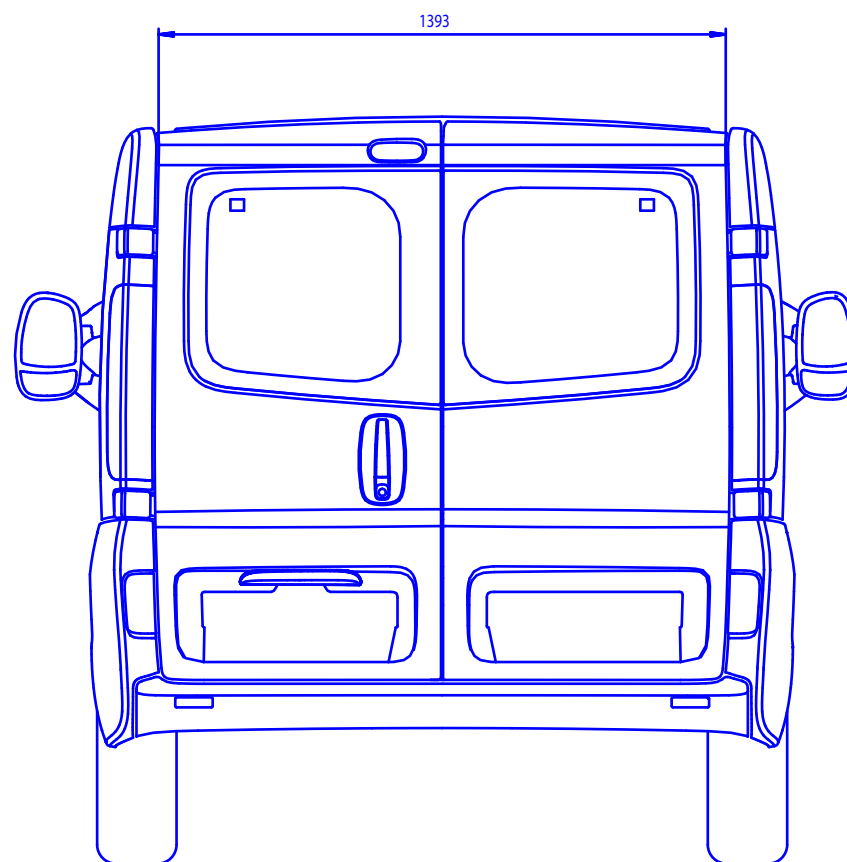

		COMBI WITH 3 SEATS								
	MODEL	J7ACA6			J7AAA6			J7ABA5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	195/65 R16								
	MAXIMUM AXLE LOAD	FA = 1450 RA = 1550								
	perm. towed laden weight	4800								
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1027	689	1716	1013	687	1700	1027	689	1716
	unladen weight MAX	1106	769	1875	1092	767	1859	1106	769	1875
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN	1357	1403	2760	1343	1402	2745	1357	1403	2760
	ALD 3 MAX	1379	1381	2760	1365	1380	2745	1379	1381	2760
	ALD 6 MIN									
	ALD 6 MAX									
	ALD 9 MIN									
	ALD 9 MAX									

		COMBI WITH 6 SEATS								
	MODEL	J7ACA6			J7AAA6			J7ABA5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	195/65 R16								
	MAXIMUM AXLE LOAD	FA = 1450 RA = 1550								
	perm. towed laden weight	4800								
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1049	732	1781	1035	730	1765	1049	732	1781
	unladen weight MAX	1128	812	1940	1114	810	1924	1128	812	1940
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN									
	ALD 3 MAX									
	ALD 6 MIN	1323	1437	2760	1309	1436	2745	1323	1437	2760
	ALD 6 MAX	1369	1391	2760	1355	1390	2745	1369	1391	2760
	ALD 9 MIN									
	ALD 9 MAX									

		COMBI WITH 9 SEATS								
	MODEL	J7ACA6			J7AAA6			J7ABA5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	195/65 R16								
	MAXIMUM AXLE LOAD	FA = 1450 RA = 1550								
	perm. towed laden weight	4700			4685			4700		
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1054	791	1845	1040	789	1829	1054	791	1845
	unladen weight MAX	1133	871	2004	1119	869	1988	1133	871	2004
	ALD 1 MIN									
	ALD 1 MAX									
	ALD 3 MIN									
	ALD 3 MAX									
	ALD 6 MIN									
	ALD 6 MAX									
	ALD 9 MIN	1302	1458	2760	1288	1457	2745	1302	1458	2760
	ALD 9 MAX	1369	1391	2760	1355	1390	2745	1369	1391	2760

Note 1:

- All weight details are based on the standard specification, without driver.
- Tyres in accordance with table.
- Fuel tank.
- Tool kit.
- Unladen weight min. : operational unladen weight (oil, water etc. filled) of model without options.
- Unladen weight max. : operational unladen weight (oil, water etc. filled) of model with all options.
- ALD3 min.: axle load distribution with 1 driver + 2 front passengers + max. load (design: unladen weight min).
- ALD3 max.: axle load distribution with 1 driver + 2 front passengers + max. load (design: unladen weight max).
- ALD6 min.: axle load distribution with 1 driver + 5 front passengers + max. load (design: unladen weight min).
- ALD6 max.: axle load distribution with 1 driver + 5 front passengers + max. load (design: unladen weight max).
- ALD9 min.: axle load distribution with 1 driver + 8 passengers + max. load (design: unladen weight min).
- ALD9 max.: axle load distribution with 1 driver + 8 passengers + max. load (design: unladen weight max).

Note 2:

- Weight distribution of vehicle passengers:

COMBI WITH 3 SEATS				COMBI WITH 6 SEATS			COMBI WITH 9 SEATS		
	FA	RA	Total:	FA	RA	Total	FA	RA	Total
Weight of driver	50	25	75	50	25	75	48	27	75
Weight of 2 front passengers	97	53	150	97	53	150	99	51	150
Weight of 3 passengers				79	146	225	79	146	225
Weight of 3 passengers							21	204	225

Note 3:

- Minimum front axle load at perm. total weight : 1175 kg
- Note maximum perm. axle loads: 2760 kg: FA = 1450 kg RA = 1550 kg.

Note 4:

- Vehicle variants:
- Individual front passenger seat instead of bench seat.
- Co-driver airbag
- Air conditioning system.
- Trailer towing hitch.
- half glazed
- Tyre optional 215/65 R16

return to
model overview