






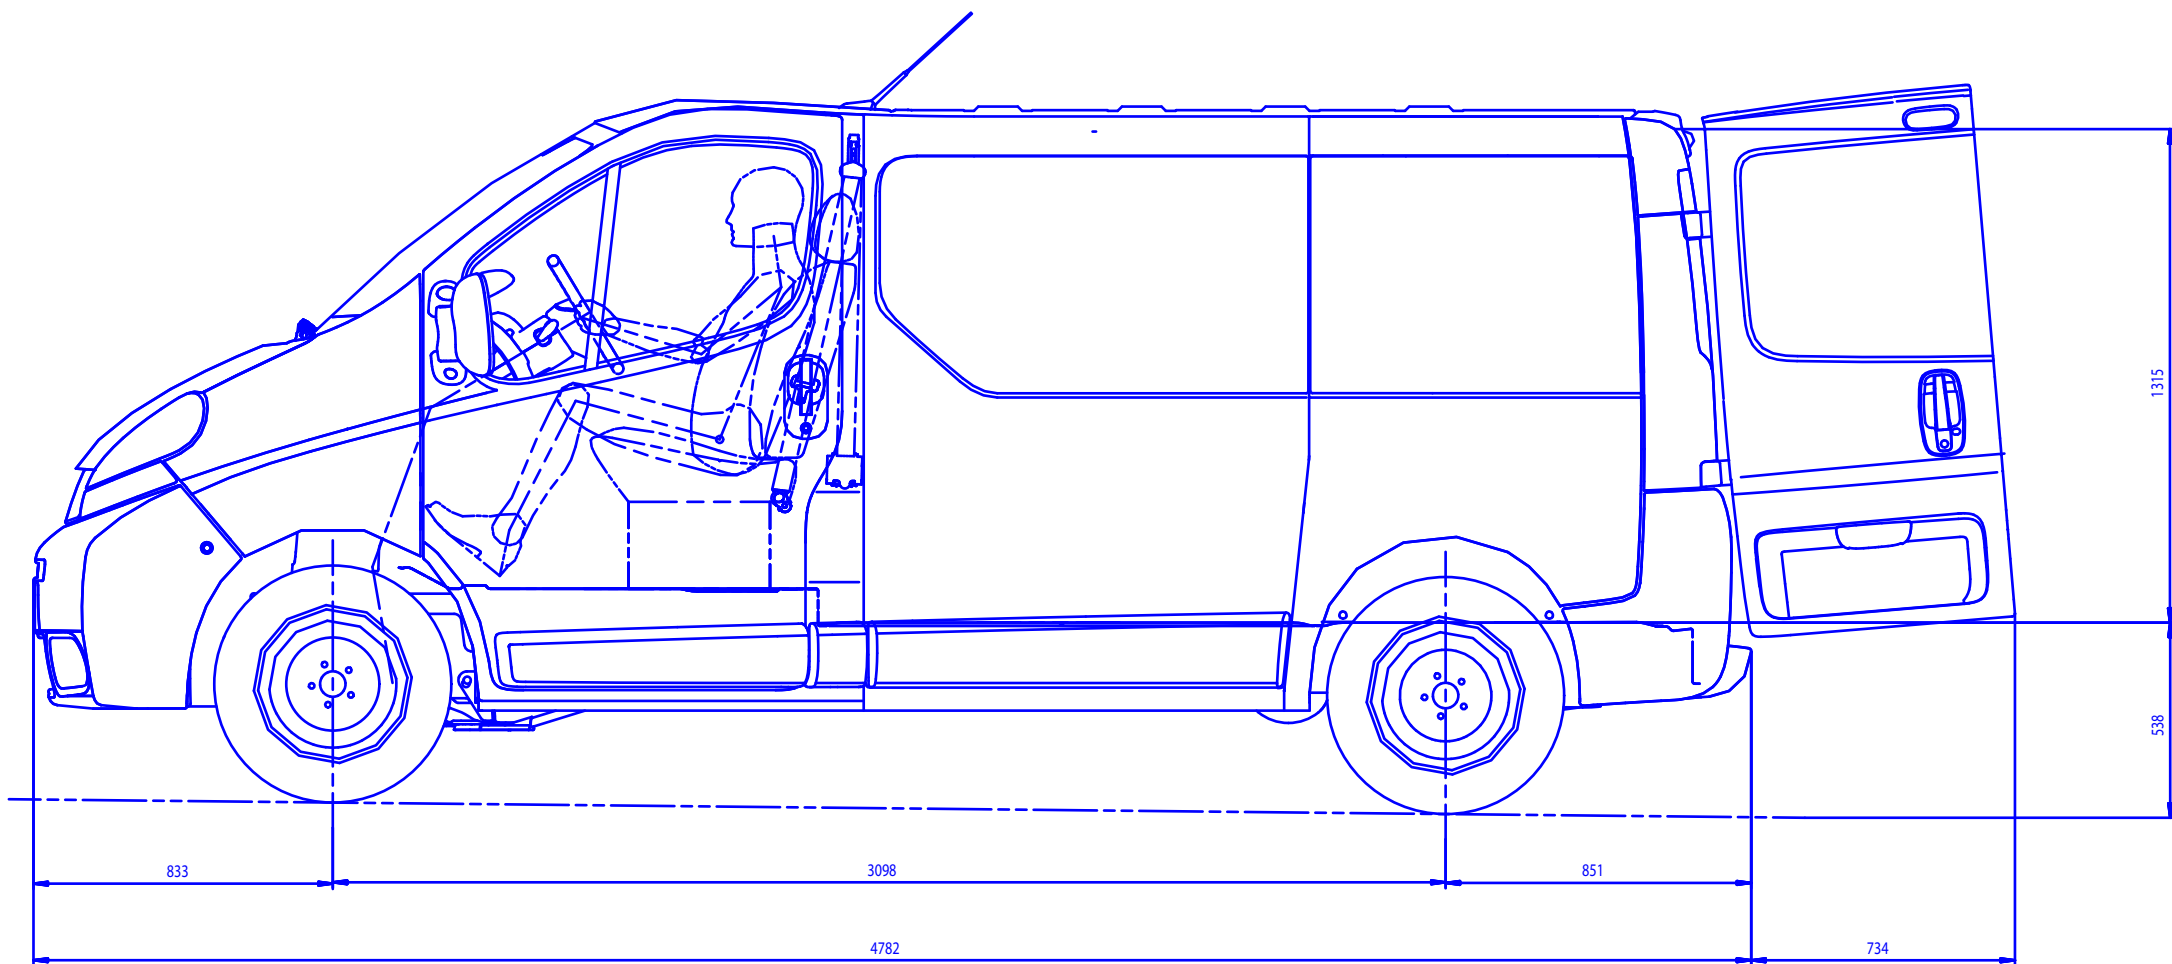

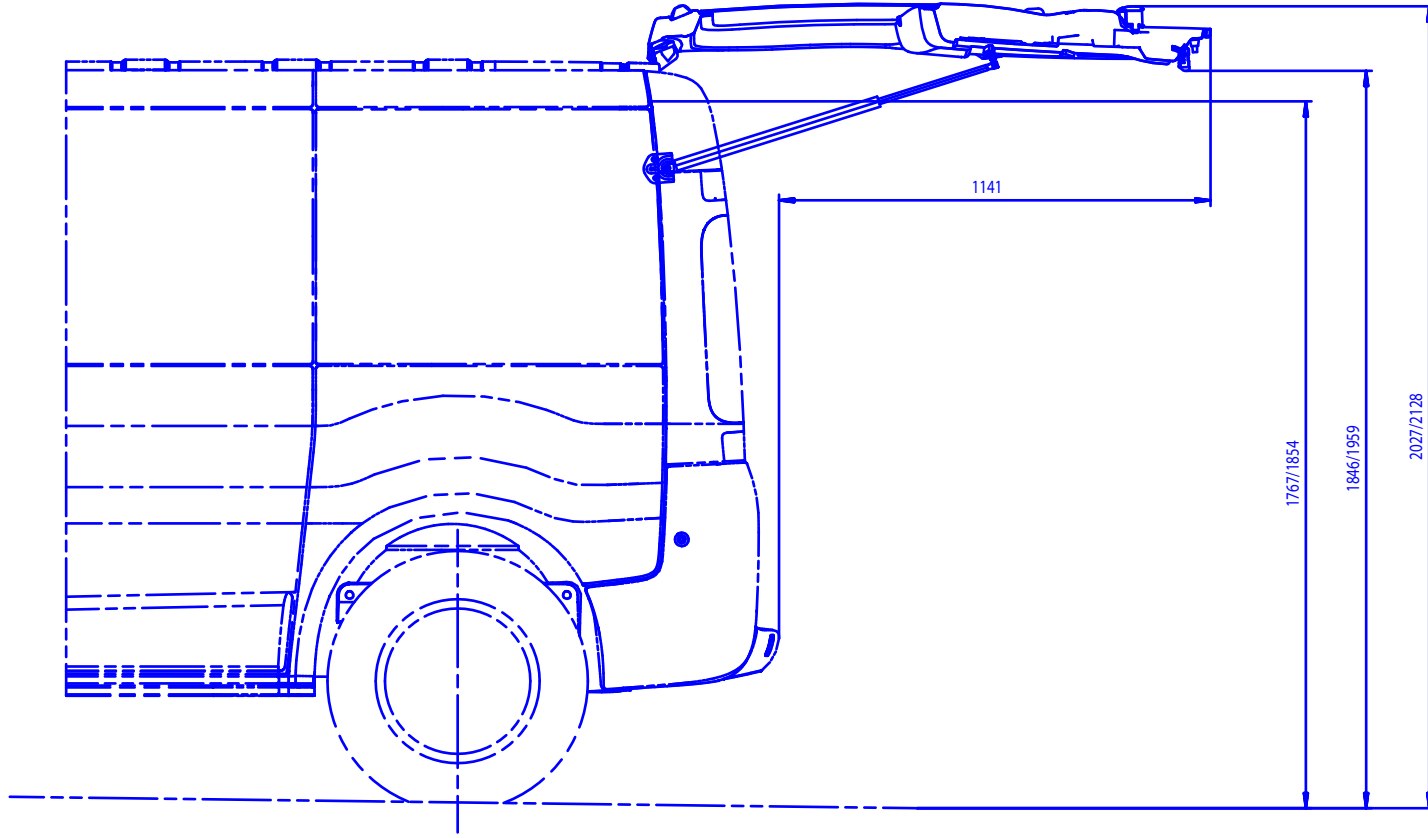

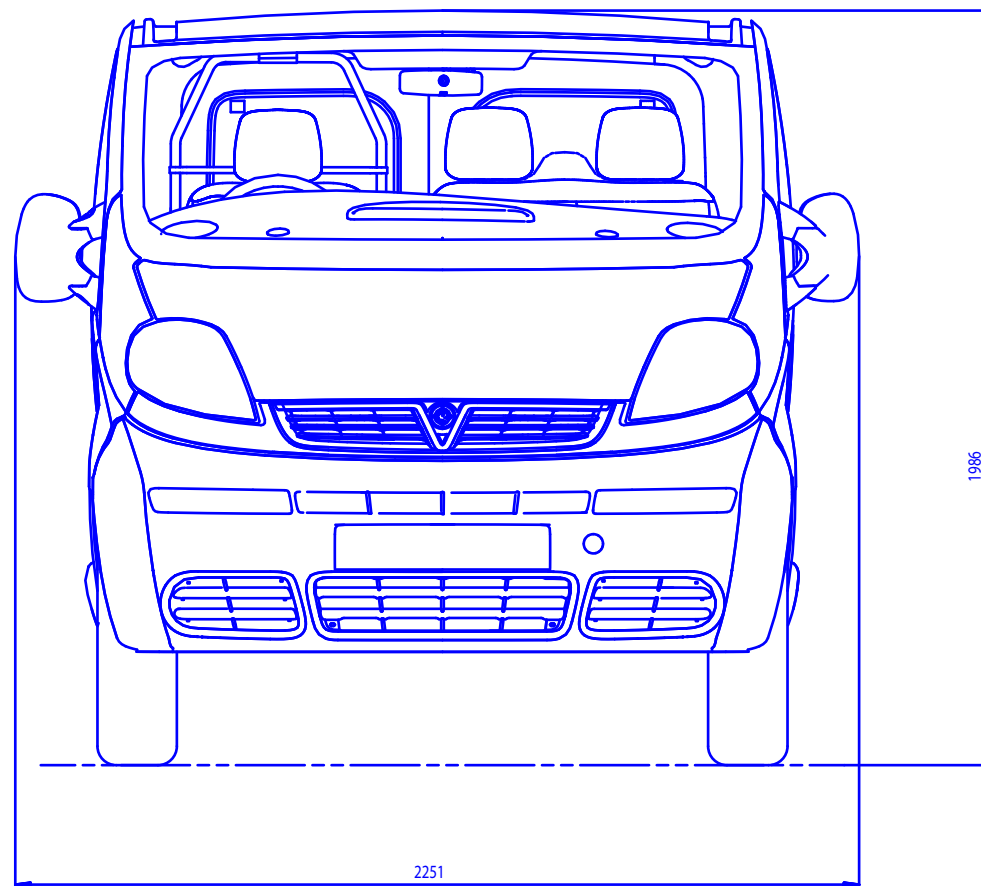

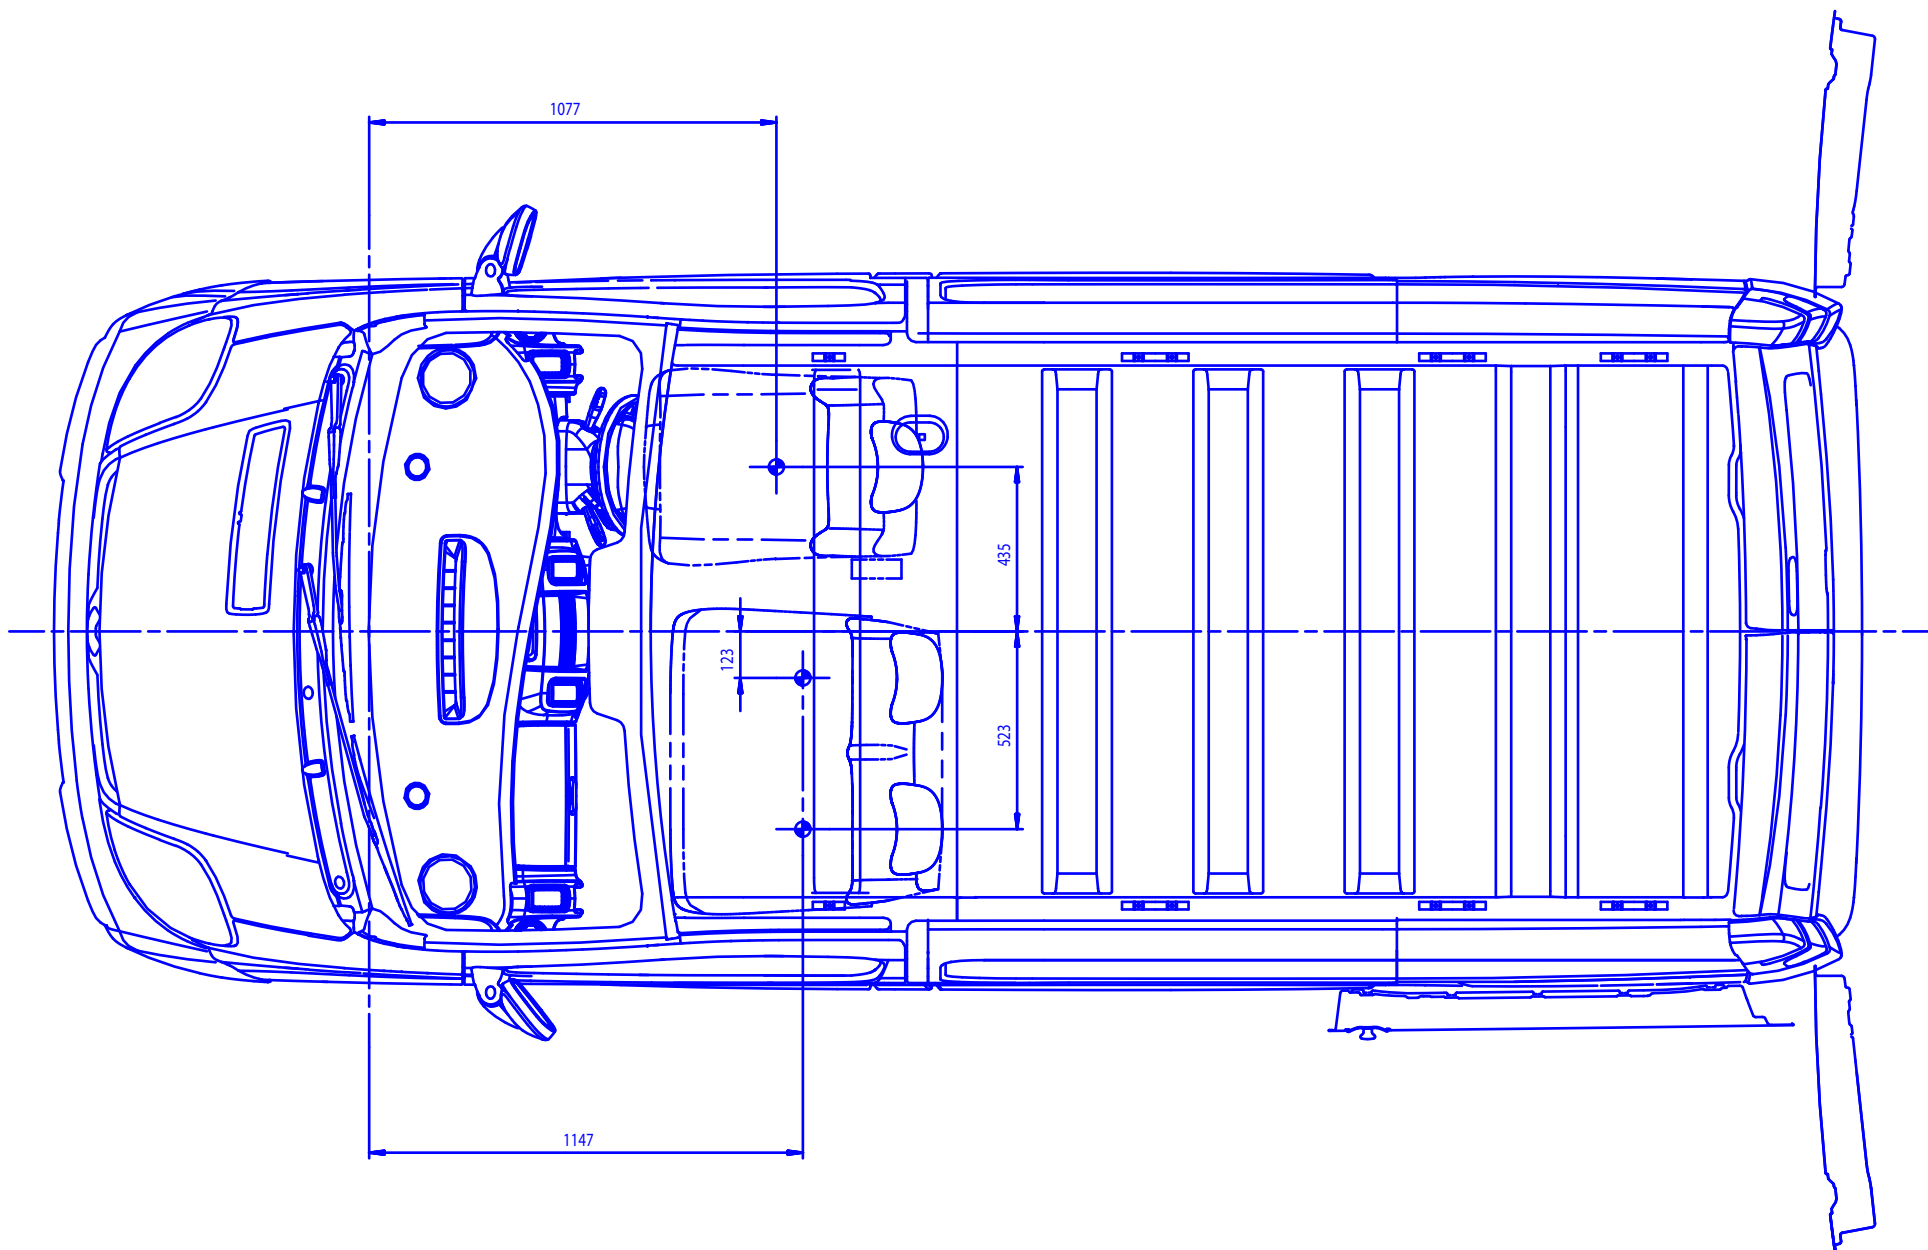

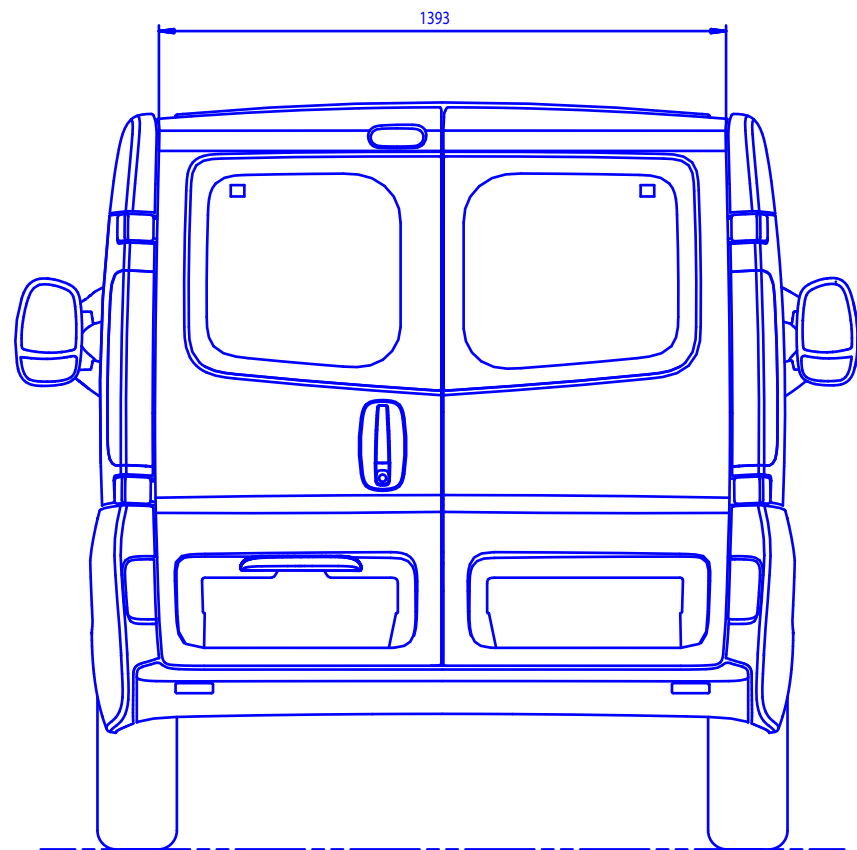

	MODEL	F7ACA6			F7AAA6			F7ABA5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	195/65 R16								
	MAXIMUM AXLE LOAD	FA = 1450 RA = 1550								
	perm. towed laden weight	4700			4685			4700		
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1034	643	1677	1020	641	1661	1034	643	1677
	unladen weight MAX	1148	782	1930	1133	780	1913	1148	782	1930
	ALD 1 MIN	1242	1458	2700	1228	1457	2685	1242	1458	2700
	ALD 1 MAX	1314	1386	2700	1299	1386	2685	1314	1386	2700
	ALD 3 MAX	1386	1314	2700	1371	1314	2685	1386	1314	2700

	MODEL	F7BCA6			F7BAA6			F7BBA5		
	ENGINE	F9Q 760			F4R 720			F9Q 762		
	TYRES	205/65 R16								
	MAXIMUM AXLE LOAD	FA = 1550 RA = 1650								
	perm. towed laden weight	4900			4885			4900		
		FA	RA	TOTAL	FA	RA	TOTAL	FA	RA	TOTAL
REFER TO NOTE 1	unladen weight MIN	1037	647	1684	1023	645	1668	1037	647	1684
	unladen weight MAX	1148	782	1930	1133	780	1913	1148	782	1930
	ALD 1 MIN	1277	1623	2900	1264	1621	2885	1277	1623	2900
	ALD 1 MAX	1347	1553	2900	1333	1552	2885	1347	1553	2900
	ALD 3 MAX	1419	1481	2900	1404	1481	2885	1419	1481	2900

Note 1:

- All weight details are based on the standard specification
- Tyres in accordance with table
- Fuel tank
- Tool kit
- Unladen weight min. : operational unladen weight (oil, water etc. filled) of model without option, without driver
- Unladen weight max. : operational unladen weight (oil, water etc. filled) of model with all options, without driver
- ALD1 min.: axle load distribution with 1 driver + max. load (design: unladen weight min.)
- ALD1 max.: axle load distribution with 1 driver + max. load (design: unladen weight max.)
- ALD3 max.: axle load distribution with 1 driver + 2 front passengers + max. load (design: unladen weight max.)

Note 2:

- Weight distribution of vehicle passengers:

	FA	RA	TOTAL
Weight of driver	50	25	75
Weight of 2 front passengers	97	53	150

Note 3:

Minimum front axle load at perm. total weight 2700 kg: 1150 kg
Minimum front axle load at perm. total weight 2900 kg: 1230 kg.

- Note maximum perm. axle loads:
2700 kg: FA = 1450 kg RA = 1550 kg.
2900 kg: FA = 1550 kg RA = 1650 kg.

Note 5:

- Vehicle variants:
- Individual front passenger seat instead of bench seat.
- Co-driver airbag
- Additional battery
- Air conditioning system.
- Trailer towing hitch.
- Loading floor and interior wood panelling.
- Continuous bulkhead with / without window.
- Fully glazed.
- 2nd side door with / without window.
- Tyre optional 215/65 R16

return to
model overview